


WALL MOUNTED DEHUMIDIFIER



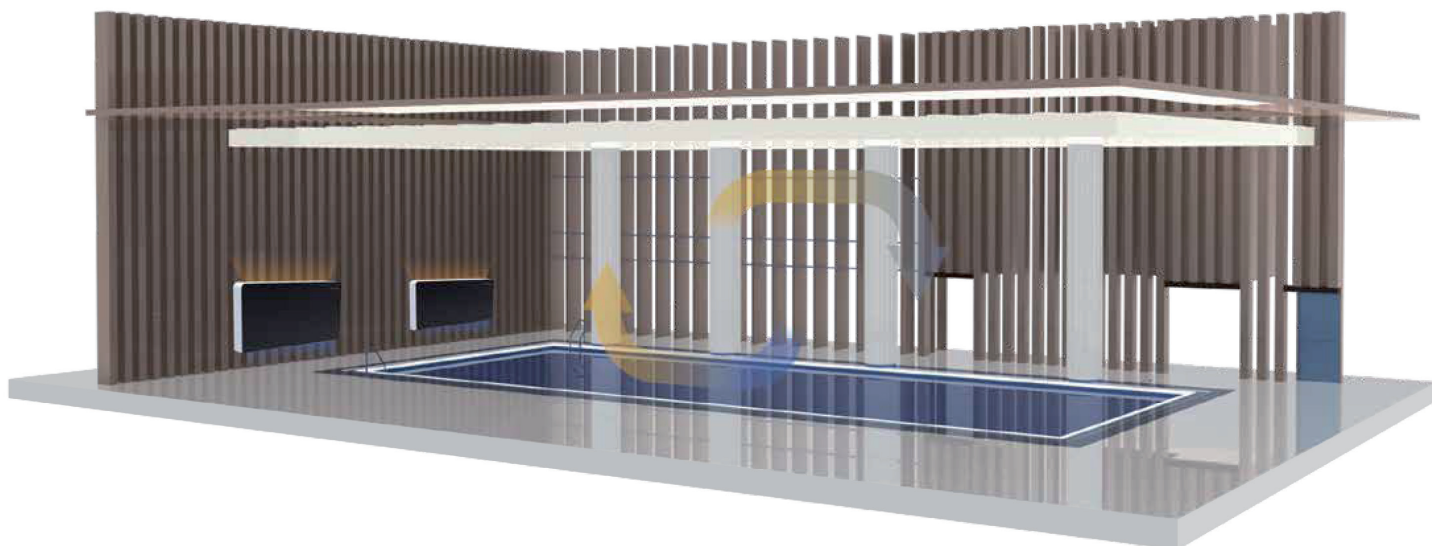

- ▶ Due to improved sound insulation and fan AC-motor, dehumidifier operates extremely silently (44-46dB(A)). That allows to install the unit in any premises.
- ▶ Air dehumidifier supplied a warm and comfortable airflow. The unit equipped with water supply heat exchanger that can be connected to water supply source.
- ▶ Heat exchanger covered with special golden epoxy coating, that has extreme anti-corrosion features. That allows to prolonge operation service of the unit in premises with high relative humidity.
- ▶ Modern and fashionable external case. C&H dehumidifiers for swimming pools can be supplied in two options. Users can choose black glance or white glance type.

Model		CH-D22RK	CH-D35RK	CH-D45RK
Dehumidification capacity	l/h	2,2	3,5	4,5
Dehumidification capacity per day	l	53	84	108
Swimming pool area	m ²	10	15	20
Noise level	dB(A)	44	46	48
Power supply		220-240V/50Hz		
Input power	kW	0,892	1,095	1,95
Input current	A	4,0	5,0	8,0
Relative humidity	%	40-90	40-90	40-90
Temperature	°C	1032		
Dimensions (LxWxH)	mm	1295×202×647	1495×202×647	1695×202×647
Refrigerant		R32		
Drine pipe	mm	16	16	16